

1111

F00F0P1503 Diesel Pump Plunger Technical File

SKU: L3B2BF00F0P1503 COMMON RAIL EXPLODED

TTTT

0

DIESEL **PUMP PART**

F00F0P1503 Diesel Pump Plunger Technical File

Content

1. F00F0P1503 Diesel Pump Plunger Introduction	2
1.1. F00F0P1503 Diesel Pump Plunger Basic Information	2
1.2. F00F0P1503 Diesel Pump Plunger Common Part Number	2
1.3. F00F0P1503 Diesel Pump Plunger Parameter	2
1.4. F00F0P1503 Diesel Pump Plunger Specifications And Dimensions	2
1.5. F00F0P1503 Diesel Pump Plunger Quality Control	3
1.6. F00F0P1503 Diesel Pump Plunger Customized Service	3
1.7. F00F0P1503 Diesel Pump Plunger Packing List and Package Size	4
1.8. F00F0P1503 Diesel Pump Plunger Testing Standard and Certificate	5
1.9. F00F0P1503 Diesel Pump Plunger Warranty Instructions	5
2. F00F0P1503 Diesel Pump Plunger Technical Support	6
2.1. F00F0P1503 Diesel Pump Plunger Part Number Location	6
2.2. F00F0P1503 Diesel Pump Plunger Installation	
2.3. F00F0P1503 Diesel Pump Plunger Not Working Normally	7
2.4. F00F0P1503 Diesel Pump Plunger Causes of Being Damaged	8
2.5. F00F0P1503 Diesel Pump Plunger Technical Support Obtaining Methods	8
3. F00F0P1503 Diesel Pump Plunger Purchase and Delivery	9
3.1. F00F0P1503 Diesel Pump Plunger Purchase Payment Term	9
3.2. F00F0P1503 Diesel Pump Plunger Main Sales Markets	9
3.3. F00F0P1503 Diesel Pump Plunger Declaration Requirements	9
3.4. F00F0P1503 Diesel Pump Plunger Shipping Ways	
3.5. F00F0P1503 Diesel Pump Plunger Lead Time	9
3.6. F00F0P1503 Diesel Pump Plunger Logistics Time for Destination Out of China's Areas	9
3.7. F00F0P1503 Diesel Pump Plunger Packing	. 10
4. F00F0P1503 Diesel Pump Plunger Storage Standard	. 11
5. Company Information	. 12
5.1. Company Introduction	. 12
5.2. Salesmen's Contact Information	. 12
6. Copyright Statement	. 13

© 2024 www.dieselpumppart.com

F00F0P1503 Diesel Pump Plunger Technical File

Diesel pump plunger is an important part of diesel pumps. Its main function is to deliver the diesel in the fuel tank to the combustion chamber of the engine with pressure. The working principle of the plunger is to compress the diesel in the fuel tank through the reciprocating motion of the piston to form high pressure, and then deliver the diesel to the engine through the transfer pipe. In the diesel pump, the plunger works together with the pump cover, spring and other components to ensure the stable supply of diesel and pressure control.

1. F00F0P1503 Diesel Pump Plunger Introduction

1.1. F00F0P1503 Diesel Pump Plunger Basic Information

Title	F00F0P1503 CP4 Series Diesel Pump Plunger	Quality
SKU	L3B2BF00F0P1503	Re-manufactured

1.2. F00F0P1503 Diesel Pump Plunger Common Part Number

(1) Diesel Pump Plunger Exchange Information

Diesel Pump Plunger Part Number	(OE Number	
F00F0P1503			

(2) Diesel Pump Plunger Application Information

Oil Pump Part Number	Vehicle Brand	Engine Mo	del	Cylinder	Voltage
0445010817	CHEVROLET	DISSUPUNE 9HN	DIESEL PUI IP PART	4	12 V
3) Diesel Pump Plunger	r Common Writing				
-00F0P1503					
L.3. F00F0P1503 Diesel	Pump Plunger Para	neter			
Adaptation System: Com	mon Rail System				
Diesel Pump Plunger Ser	ies: CP4 Series				
Diesel Pump Plunger Typ	e: High Pressure Com	mon Rail Diesel	Pump Plunge	r	
1.4. F00F0P1503 Diesel	Pump Plunger Speci	fications And I	Dimensions		
Diesel Pump Plunger Size	e: 14cm* 6cm *3cm				
Diesel Pump Plunger Net	Weight: 410g				
Diesel Pump Plunger Gro	oss Weight: <mark>500g</mark>				
Diesel Pump Plunger Qu	ality: Re-manufacture	d P			
Diesel Pump Plunger Pac	kage Size: 17cm* 7.5c	m *7cm			
Diesel Pump Plunger MC	Q: 1 Pieces				

1.5. F00F0P1503 Diesel Pump Plunger Quality Control

(1) Diesel Pump Plunger Testing

All diesel pump plungers are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Diesel Pump Plunger Assembling

For the quality control of the diesel pump plunger production and installation process, our company strictly follows the standard product installation data and product installation steps to install.

(3) Diesel Pump Plunger Inspection

The factory inspection of the diesel pump plunger is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same diesel pump plunger for more than three times for factory inspection, and the diesel pump plunger installation testing environment are progressed in dust-free workshop.

1.6. F00F0P1503 Diesel Pump Plunger Customized Service

(1) Diesel Pump Plunger Customized Service Coverage: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, diesel pump plunger internal packaging, diesel pump plunger external packaging and labels customized, etc.





Diesel Pump Plunger Housing Label

(2) Diesel Pump Plunger Customized Service Requirements:

The quantity of customized diesel pump plungers shall not be less than 10 pieces.

The quantity of customized diesel pump plunger packages shall not be less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

• Once the customized diesel pump plunger is sold, it cannot be returned or exchanged if there are no quality problems.

1.7. F00F0P1503 Diesel Pump Plunger Packing List and Package Size

(1) Diesel Pump Plunger Spare Parts List

No.	1	2	3	
Image	Course a			
Name	Diesel Pump Plunger	Bubble Bag	White Anti-rust Bag	
DescriptionPump plunger part number: F00F0P1503		Prevent the diesel pump plunger from being damaged by external forces	Prevent diesel pump plunger from rusting	
No.	4	5	6	
Image	DESICONAT BESICONAT SILLICA GEL THROWARN THROWARN THROWARN THROWARN THROWARN BESICONAT		DIESEL PUMP PART	
Name	Desiccant	Diesel Pump Plunger Packing Box		
Description	Prevent diesel pump plunger from rusting; absorb moisture	Place the diesel pump plunger and diesel pump plunger accessories	//	


A Minors are prohibited from using the diesel pump plunger assembly, O-rings, diesel pump plunger housing covers, oil return covers, VCI anti-rust bags, and bubble bags to avoid personal injury.

The diesel pump plunger housing cover and oil return cover are recyclable accessories and can be recycled.

VCI anti-rust bags and bubble bags are non-degradable materials. Please dispose of them properly after use.

A The diesel pump plunger and the installation parts guide tube should be treated with appropriate sealing oil during installation.

(2) Diesel Pump Plunger Box Size

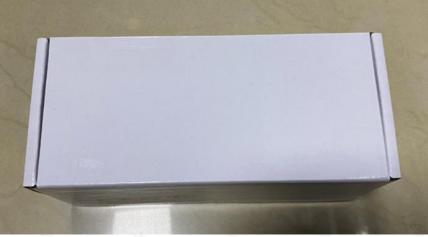

No.	Name	Diesel Pump Plunger Packing Size (cm)
1	Diesel Pump Plunger Box	17*7.5*7

1.8. F00F0P1503 Diesel Pump Plunger Testing Standard and Certificate

www.dieselpumppart.com can provide the factory quality inspection test report of each diesel pump plunger to ensure that each diesel pump plunger delivered meets the engine performance indicators.

BOTEN		测试	报告	4.05.2019	10:42:01
录伸企业:					
电话:		184	t;		
倚真:		403	IA:		
SPRE:					
tið:		30 B	8单位:		
倚篇:		8月	·姓名:		
秋野 脱述:					
2211名称:	酸苯氨				
型号·零件号:					
Kilan:					
		檢測	结果		
031809:0		12.10.20		10220553	
10-12-12-20	喻和研測值	经非规定委员	REPERCIPUS	相關國家和國	14
LEAR TEST:	32	±	**	30.8414.6	~
Rade:	3.0	- *	75.7	41 0 + 21 5	*
WARM.	3.6	147 3±165	0		
Maar	50.5	218 9±14.4	.,	<u>B</u> erter	~
0.0000	28.4	34X±85	63	····· b·····	*
n.:	141	15,7±4.8	63		*
U.;		12232			
		45±12	63	•	1

1.9. F00F0P1503 Diesel Pump Plunger Warranty Instructions

(1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the diesel pump plunger inspection equipment when the diesel pump plunger is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) Diesel Pump Plunger Warranty Coverage

Within 15 days after customer receives the F00F0P1503 diesel pump plunger, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the FOOFOP1503 diesel pump plunger has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the diesel pump plunger house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

A Tips: For products not covered by warranty, our company can provide paid maintenance services. For

products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Diesel Pump Plunger Out of Warranty Coverage

① The warranty period has expired.

2 Pump plunger failure caused by high temperature, high pressure, humidity, rain and snow, salinealkali land, earthquake, and used in abnormal environment.

③ Customer disassembles or repairs the diesel pump plunger personally resulting in damage to the diesel pump plunger.

④ Pump plunger damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

⁽⁵⁾ Pump plunger failure or diesel pump plunger damage caused by non-diesel pump plunger design, technology, manufacturing, quality, and other issues.

6 Pump plunger failure due to system pressure exceeding system approved pressure.

 \bigcirc Pump plunger failure caused by system voltage exceeding approved voltage.

8 Pump plunger failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

9 Pump plunger failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

(1) Pump plunger failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

11 Pump plunger failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

12 Pump plunger failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

13 Pump plunger failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

14 Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the diesel pump plunger connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

2. F00F0P1503 Diesel Pump Plunger Technical Support

2.1. F00F0P1503 Diesel Pump Plunger Part Number Location

(1) E.g.: See the diesel pump plunger part number as follows:



No.	Name
Α	Nameplate, logo, part number

2.2. F00F0P1503 Diesel Pump Plunger Installation

(1) F00F0P1503 Diesel Pump Plunger Installation Precautions:

The replacement of the diesel pump plunger must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between

the fuel system and the diesel pump plunger, the fitting clearance of the diesel pump plunger connection, the installation angle and tightening torque of the diesel pump plunger, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the diesel pump plunger.

When installing the diesel pump plunger on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the diesel pump plunger, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

f A When installing the diesel pump plunger on the engine, please carefully check the components related

to the installation of the diesel pump plunger, such as the diesel pump plunger pressure plate, screw, diesel pump plunger rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

A It is forbidden to operate the bare diesel pump plunger for a long time in an environment with serious dust pollution and corrosion to iron products.

A It is forbidden to operate the bare diesel pump plunger for a long time in a strong magnetic field environment.

2.3. F00F0P1503 Diesel Pump Plunger Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

- (2) Vehicle oil pump's oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the diesel pump plunger of the vehicle.
- (5) The long-term placement of the diesel pump plunger causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

A Before installing, carefully check whether other components in the common rail system except the diesel pump plunger are damaged to prevent the diesel pump plunger from not working properly after being replaced.

2.4. F00F0P1503 Diesel Pump Plunger Causes of Being Damaged

- (1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the diesel pump plunger.
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the diesel pump plunger, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the diesel pump plunger.
- (4) The abrasion of the diesel pump plunger produces iron powder and aluminum powder enter the diesel pump plunger and cause damage to the diesel pump plunger.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the diesel pump plunger and causing damage to the diesel pump plunger.
- (6) The diesel pump plunger is damaged due to replacement or adjustment of the relevant parts of the diesel pump plunger. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the diesel pump plunger fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long-time working result in damage to the diesel pump plunger.
- (8) The diesel pump plunger will be damaged naturally at the end of its working life.
- (9) The diesel pump plunger is magnetized (diesel pump plunger parts' magnetic exceeded) causing the diesel pump plunger to not work properly.

A Before replacing the diesel pump plunger, please check the engine parts carefully according to the engine maintenance manual to avoid the diesel pump plunger being damaged again after replacement.

2.5. F00F0P1503 Diesel Pump Plunger Technical Support Obtaining Methods

- Diesel Pump Plunger Technical File, visit <u>http:// www.dieselpumppart.com /download/</u> to get the technical file.
- (2) Diesel Pump Plunger Technical Videos
- YouTube : <u>https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw</u> to get the technical

videos, constantly follow can get more information.

(3) Diesel Pump Plunger Information Query Software
TruckBook Parts EPC APP, Android/Apple App Store download and install, visit <u>http://www.dieselpumppart.com</u> to get the download and installation tutorial
(4) Search The fuel Diesel Pump Plunger test data through TruckBook Parts EPC APP.

3. F00F0P1503 Diesel Pump Plunger Purchase and Delivery

3.1. F00F0P1503 Diesel Pump Plunger Purchase Payment Term Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

3.2. F00F0P1503 Diesel Pump Plunger Main Sales Markets Diesel Pump Plunger Main Sales Markets: Asia, Europe, North America, South America, Africa etc.

3.3. F00F0P1503 Diesel Pump Plunger Declaration Requirements

We can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. F00F0P1503 Diesel Pump Plunger Shipping Ways

Destination in China Areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations Out of China's Areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. F00F0P1503 Diesel Pump Plunger Lead Time

Lead Time: Send out within 3 - 7 working days after receiving payment (Except for special products and special cases).

3.6. **F00F0P1503** Diesel Pump Plunger Logistics Time for Destination Out of China's Areas DHL Logistics Time:

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Т	Japan	3 Days	DIESEL PLUKART DIESE	5-7Days	Egypt	5-7 Days
	Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
	Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
	Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days

P

Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Diese Israel	5-7 Days	e num mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	-1	1		1

A The logistics time is for reference only and is subject to the actual arrival.

3.7. F00F0P1503 Diesel Pump Plunger Packing

Domestic Express Packaging: Usually wrapped in waterproof scotch tape, such as picture No. 1. **International Express Packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 2.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3, also, the products can be packaged according to customers' requirements.


The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

A Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Pic No. 1 Domestic express packaging: Wrapped with Transparent tape



Pic No. 2 International express packaging: Wrapped with yellow tape after wrapping black protective film



Pic No. 3

Pallet shipment: Use pallets that meet export requirements and wrap with white plastic wrap and tie.

4. F00F0P1503 Diesel Pump Plunger Storage Standard

(1) Choose a Suitable Storage Place

The warehouse and cargo yard where the diesel pump plunger is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkali, salt, and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict Requirements of Warehousing

Strict inspections should be carried out when the diesel pump plungers are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ashes, and other dirt, remove the rust and do anti-rust treatment in time. Packaged diesel pump plungers must be protected from damage.

(3) Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the diesel pump plungers placed in the room, and the corrosion of the diesel pump plungers is significantly reduced.

Pump plungers must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the diesel pump plunger is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the diesel pump plunger from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the diesel pump plunger package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the diesel pump plunger exposed in the air for a long time.

It is forbidden to store acids, alkalis, salts, and other substances together with the diesel pump

plunger.

A The unpacked diesel pump plunger must be rust-proof during secondary storage.

5. Company Information

- Office Locations
- Global Exhibitions

5.1. Company Introduction

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Exit C, Qiao Touxi Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

• After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.9. F00F0P1503 Diesel Pump Plunger Warranty Instructions</u>)

5.2. Salesmen's Contact Information

Name		WeChat/WhatsApp
RT DIESEL PUMP PART DIESEL	Ruby	+86-13410541523

© 2024 www.dieselpumppart.com

6. Copyright Statement

P

This material and trademark appear on this file are protected by copyright and is owned by www.dieselpumppart.com. Any use of this material, including copying, distribution, modification, or creating derivative works, is strictly prohibited without the written permission of the copyright holder.

Permission to use this material may be granted under certain conditions, such as for non-commercial or academic purposes only, and must be obtained in writing from the copyright holder. Please ensure the name and title of the work, along with a link to the original source, are included whenever possible.

The copyright holder retains all rights, including the right to take legal action against anyone infringing on these rights. This notice serves to protect the copyright holder's rights and ensure the material is used appropriately.



13/14

Website : www.dieselpumppart.com

© 2024 www.dieselpumppart.com